

# CHEETAH

RUGGEDIZED CAMERA SERIES

Front View

Rear View

## CXP-C4540

CMOS 20.4 MP

Dual CXP-6

### Imperx: C4540

The low-power CXP-C4540 camera features the Sony Pregius S™ IMX531 Global Shutter CMOS sensor with a native resolution of 4512 x 4512 in a 1.1" optical format delivering up to 55.8 frames per second with a dual CXP-6 CoaXPress output. The Pregius S technology uses a stacked back-illuminated pixel structure offering reduced pixel size, increased peak quantum efficiency, and improved sensitivity with fast lenses. A dual ADC mode enables HDR imaging by combining high gain and low gain lines within the image sensor. Short interframe time of 2 μs makes the camera suitable for PIV applications. The camera features low power consumption and operates over an extended temperature range from -30 °C to +75 °C. Imperx puts you in control and gives you full access to raw data without corrections. Using the simple, intuitive GenICam™ compliant user interface, you can quickly apply image corrections, if desired. The CXP-C4540's flexibility, image quality, and speed make it suitable for a broad range of diverse and demanding applications, but "one size doesn't fit all," and Imperx can help optimize the camera to your exact requirements.

### Specifications


Feature	Description	Feature	Description
Output Interface	2-channel CXP-6 CoaXPress w/PoCXP	PIV Mode	Available in Free run and Fast trigger modes
Resolution	4512 (H) x 4512 (V)	PIV Interframe Time	2 μs (recommended by the image sensor's manufacturer)
Sensor	Sony Pregius S IMX531 CMOS Color/Mono	External Inputs/Outputs	2 IN (OPTO, LVTTTL) / 2 OUT (OPTO, TTL)
Sensor Format	12.3 mm (H) x 12.3 mm (V), 1.1" optical format	Strobe Output	2 strobes, programmable position and duration
Pixel Size	2.74 microns square	Pulse Generator	Yes, programmable
Shutter	Global shutter (GS)	Data Correction	2 LUTs pre-programmed with Gamma 0.45, 2 LUTs pre-programmed with Negative LUT; Bad and Defective pixel correction (static), 8 Flat field correction tables
Sensor Digitization	10, 12-bit	Lens Mount	C-Mount (default)
Frame Rate	55.8 fps (8-bit), 45.5 fps (10-bit), 38 fps (12-bit)	Canon EF-Mount	Optional, Active or Passive
Dynamic Range	71 dB	Power	Power over CoaXPress or 6.5 V–33 V external power supply (Optional)
Output Bit Depth	8, 10, 12-bit	Power Consumption	Typ.: 4.32 W @ 12 V, 25 °C Max.: 4.52 W @ 12 V, 75 °C
Analog/Digital Gain	Manual, Auto; 0 dB – 48 dB, 480 steps	Size - Width/Height/Length	60 mm (W) x 60 mm (H) x 47 mm (L)
Digital Gain	0x to 4x (12 dB) with a step of 1/4096	Weight	370 g
AEC/AGC	Off, Once, Auto	Vibration, Shock	20G (20 – 200 Hz XYZ) /100G
Gamma Correction	0.00 to 4.00, with a step of 0.01	Environmental	-30 °C to +75 °C Operating, -40 °C to +85 °C Storage
Black Level Offset	Manual (0 – 4095), Auto	Humidity	10% to 90% non-condensing
White Balance	Manual, Auto, Once, Off	MTBF	452,000 hours @ 50 °C (EST) (Telcordia SR-332)
Shutter Speed	8 μs to 16.0 s	Military Standard	MIL-STD-810G
HDR Imaging (Dual ADC)	Available with 12-bit sensor digitization only	Regulatory	FCC Part 15 Class A, CE, RoHS UKCA
Exposure Control	Off, Internal, External, Auto		
Regions of Interest (ROI)	One Master ROI, two Processing ROI		
Binning	1 x 2, 2 x 1, 2 x 2 (Mono cameras only)		
Sub-sampling	1 x 2, 2 x 1, 2 x 2		
Trigger Inputs	External, Pulse generator, Software, Link Trigger (Trigger over CXP)		
Trigger Options	Edge, Pulse width, Trigger filter, Trigger delay, Debounce		
Trigger Modes	Free run, Standard, Fast		

## Imperx: C4540 Applications


The CXP-C4540 incorporates a number of unique features tailored to reduce system complexity, maximize interface bandwidth, and expand the usable operational range.

Particle Image Velocimetry • Aerospace • Satellites • Surveillance • Ball Grid Array • Printed Circuit Board Inspection • Motion Analysis • Unmanned Aerial Vehicles • Machine Vision • Intelligent Traffic Systems • Aerial Imaging • Situational Awareness

## Absolute Quantum Efficiency

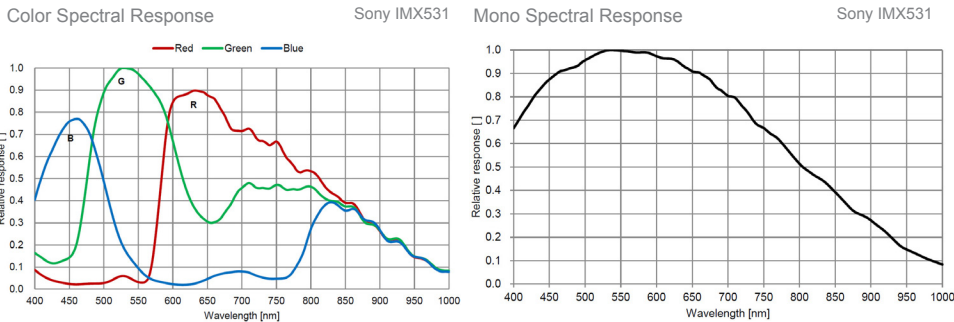

## Dimensions

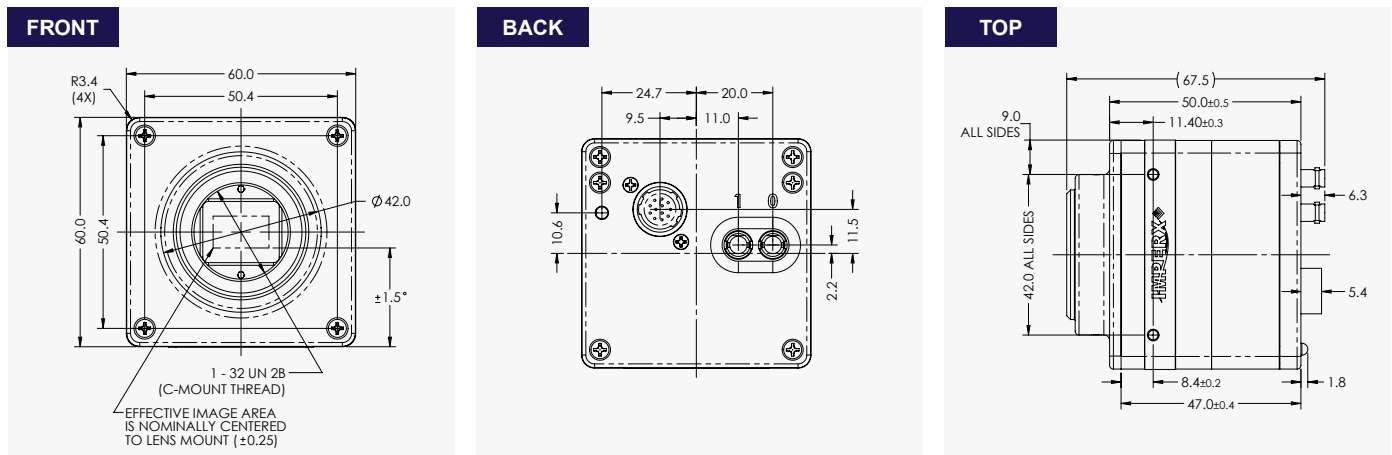

## Ordering Information

<b>Output Interface</b> 2-channel CXP-6 CoaXPress w/PoCXP (CXP)	<b>Lens Mounts</b> C-Mount (Default)      M42 (Optional) F-Mount (Optional)      Canon EF Mount (Optional)
<b>Sensor Types available</b> Monochrome Bayer Color	<b>Accessories (Sold separately)</b> PS12V14A: Power Supply w/1 input and 1 output CBL-PWIO01: Cable Power; Hirose 12p (F) to loose end; 2 meters

## Gen<I>Cam Compliant Camera Configurator

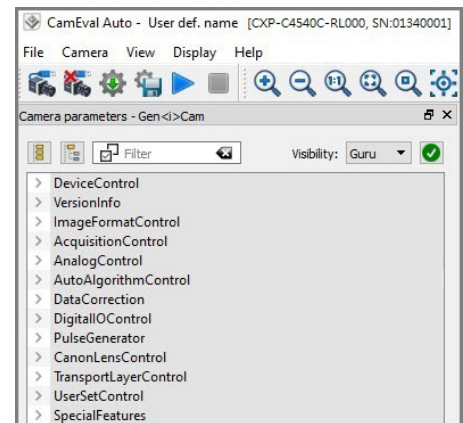


Image of the software interface is for illustrative purposes only. Camera configurator software is not available from Imperx, but is available from the frame grabber supplier.

## Connectors

<b>Power and I/O Interface</b> 	<b>CXP-connectors</b> Two micro-BNC (HD-BNC) 75 Ohm jacks
------------------------------------	--

1. 12/24 VDC Return      7. OUT1 (TTL)  
 2. +12/24 VDC            8. IN1 (OPTO)  
 3. Reserved                9. IN2 (LVTTTL)  
 4. Reserved                10. IN1 RTN  
 5. OUT2 RTN (OPTO)      11. IN2 RTN  
 6. OUT1 RTN                12. OUT2 (OPTO)

Connector: Hirose HR 10A-10R-12PB(71)

Rev: cxp\_c4540\_r4\_2024

Quality Management System ISO 9001:2015 Registered  
 Environmental Management System ISO 14001:2015 Registered  
 DDTC Registered (Directorate of Defense Trade Controls, US Department of State)



IMPERX 6413 Congress Ave Suite 150, Boca Raton, FL 33487, USA  
 Tel: +1-561-989-0006. Email: sales@imperx.com

WWW.IMPERX.COM

Technical data has been fully checked, but accuracy of printed matter is not guaranteed. Subject to change without notice. Copyright 2024.